

# Ultrasonic Flow Meter/ Monitor/Counter/Dosing Unit

DUK




DUK with U-PACE electronics



Display rotatable in 90° steps



KofiCom Interface set



- Measuring range:  
0.01 - 15 ... 2.5 - 630 l/min
- Accuracy:  
0.7 % of reading + 0.7 % of full scale
- Range span: at least 250
- $p_{\max}$ : 16 bar;  $t_{\max}$ : 90 °C
- Connection:  
G 1/2 ... G 3, 1/2" ... 3" NPT female
- Material: brass or stainless steel 1.4408
- Analogue, frequency and switching outputs, compact electronic with digital display
- Additionally for option C3T0:  
Temperature measuring, bi-directional measurement, measuring of viscous media up to 68 mm<sup>2</sup>/s, IO-Link



KOBOLD companies worldwide:

AUSTRALIA, AUSTRIA, BELGIUM, BULGARIA, CANADA, CHINA, CZECHIA, FRANCE, GERMANY, GREAT BRITAIN, HUNGARY, INDIA, INDONESIA, ITALY, MALAYSIA, MEXICO, NETHERLANDS, PERU, POLAND, REPUBLIC OF KOREA, SPAIN, SWITZERLAND, THAILAND, TUNISIA, TURKEY, USA, VIETNAM

KOBOLD Messring GmbH  
Nordring 22-24  
D-65719 Hofheim/Ts.  
Head Office:  
+49(0)6192 299-0  
+49(0)6192 23398  
info.de@kobold.com  
www.kobold.com

## Description


The new KOBOLD type DUK flow meters are used for the measurement, monitoring, metering and dosing of low viscosity fluids.

The devices work on the principle of the difference in running times. This is based on the fact that ultrasonic waves in a medium are influenced by the speed of flow.

Two sensors mounted opposite one another in the pipeline function simultaneously as transmitter and receiver of ultrasound signals.

If there is no flow, then the running times of both signals are identical. If the medium is flowing, then the running time of the signal against the flow is longer than that with the flow.

The running time difference, which is determined by a microprocessor, is proportional to the speed of flow.

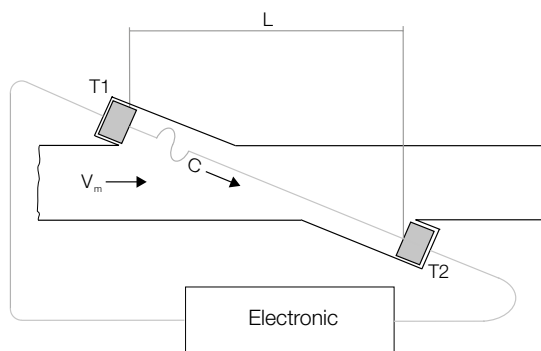

The devices can be equipped with a switching output, a frequency output or an analogue output. In addition, a universal U-PACE electronics (Universal Precision and Control Electronics, order code C3T0) is available and features two outputs arbitrarily configurable by the customer.

The compact electronics offers various diagnostic functions and the following features:

- Flow- and temperature measurement
- Monitoring, dosing and transmitter function
- Dosing function with external control input
- Coloured, multi-parameter configurable TFT-display, rotatable in 90° steps
- Bidirectional measuring
- Intuitive setup menu via 4 optical touch keys
- 2 configurable outputs (pulse-/frequency-/alarm- and analogue output)
- Grand and resettable totaliser
- IO link function
- CSA certification of U-PACE electronics for Ordinary Locations (Ordloc)
- International IECCE Certification acc. to CB-Scheme with U-PACE

## Advantages

- High range span of at least 1:250
- Small pressure loss
- High repeat accuracy  $\pm 0.1$  % of full scale
- Independent from density and temperature

## Areas of Application

- Machine building
- Automotive
- Robotic
- Cooling
- Hot water

## Technical Details

### Sensor

|                      |                                                                                                       |
|----------------------|-------------------------------------------------------------------------------------------------------|
| Measuring principle: | ultrasonic                                                                                            |
| Range:               | see table                                                                                             |
| Medium:              | water, various media                                                                                  |
| Viscosity:           | All Media in „DUK Media Tables Overview“ within media temperature range (Additional media on request) |

### Sensor for temperature measurement:

|                      |                                                                                                                                                                 |
|----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| measuring principle: | PT1000 (only for option C3T0)                                                                                                                                   |
| Accuracy flow*:      | 0.7 % of reading + 0.7 % of full scale (water/water-glycol $\leq 10$ mm <sup>2</sup> /s)<br>1.5 % of reading + 0.7 % of full scale ( $> 10$ mm <sup>2</sup> /s) |

### Accuracy temperature:

|                      |                                                          |
|----------------------|----------------------------------------------------------|
| measuring principle: | $\pm 1^\circ\text{K}$ (depending on ambient temperature) |
|----------------------|----------------------------------------------------------|

### Repeat accuracy:

|                      |                           |
|----------------------|---------------------------|
| measuring principle: | $\pm 0.1$ % of full scale |
|----------------------|---------------------------|

### Mounting position:

|                      |                                                                                            |
|----------------------|--------------------------------------------------------------------------------------------|
| measuring principle: | in all directions, flow in direction of the arrow (horizontal: electronic on top or below) |
|----------------------|--------------------------------------------------------------------------------------------|

### In-/Outlet:

|                      |         |
|----------------------|---------|
| measuring principle: | 10 x DN |
|----------------------|---------|

### Media temperature:

|                      |                |
|----------------------|----------------|
| measuring principle: | -20 ... +90 °C |
|----------------------|----------------|

### Ambient temperature:

|                      |                                                |
|----------------------|------------------------------------------------|
| measuring principle: | -20 ... +70 °C<br>-20 ... +60 °C (option C3T0) |
|----------------------|------------------------------------------------|

\* Under reference conditions in standard flow direction

### Reference conditions:

Medium: water;  
Medium's and ambient temperature: 15 °C ... 30 °C, 1 bar,  
connection pipe inside diameter  $\geq 13$  mm (for  $\frac{1}{2}$ "),  $\geq 19$  mm (for  $\frac{3}{4}$ "),  
 $\geq 26$  mm (for 1"),  $\geq 39$  mm (for  $1\frac{1}{2}$ "),  $\geq 52$  mm (for 2"),  
 $\geq 78$  mm (for 3")  
Flow in direction of the arrow marking



### Technical Details (continued)

Response time  $t_{90}$ : approx. 0.5...1 s at flow change  
> 10 % FS  
(depending on electronic version)

Response time  $t_{90}$   
temperature: max. 30 s (flow > 1 m/s)

Pressure: 0 ... 16 bar

Pressure loss: max. 150 mbar at full scale

Protection: IP 65

### Wetted Parts

Sensor housing: brass or stainless steel 1.4408

Sensors: PEEK

Seal: NBR, FKM (EPDM on request)

### Measuring Ranges and Weights

| Model    | Measuring range<br>[l/min] | Size<br>[G/NPT] | DUK-...S30x<br>DUK-...F3xo<br>DUK-...Lxx3 | DUK-...C3T0    |
|----------|----------------------------|-----------------|-------------------------------------------|----------------|
| DUK-1xx3 | 0.01 - 15                  | ½"              | approx. 850 g                             | approx. 1050 g |
| DUK-1xx4 | 0.08 - 20                  | ½"              | approx. 850 g                             | approx. 1050 g |
| DUK-1xx5 | 0.16 - 40                  | ¾"              | approx. 1050 g                            | approx. 1250 g |
| DUK-1xx6 | 0.25 - 63                  | 1"              | approx. 1450 g                            | approx. 1650 g |
| DUK-1xx8 | 0.6 - 150                  | 1½"             | approx. 2350 g                            | approx. 2550 g |
| DUK-1xx9 | 1 - 250                    | 2"              | approx. 3800 g                            | approx. 4000 g |
| DUK-1xxB | 2.5 - 630                  | 3"              | approx. 7100 g                            | approx. 7300 g |

### Electrical Details

#### DUK-...S300, DUK-...S30D

Display: Duo-LED for switch status

Switching output (..S300): relay SPDT max. 1 A/30 V<sub>DC</sub>

Switching output (..S30D): active 24 V<sub>DC</sub>, N/C and N/O

Switch point: 10...90 % FS in 10 %-steps  
that can be configured by the  
customer using a rotary switch

Power supply: 24 V<sub>DC</sub> ± 20 %

Power consumption: 30 mA

Electrical connection: plug M 12, 5-pin

Meas. range overflow: flash of the DUO-LED (red/green)  
from 105 % of full scale

Power consumption: max. 45 mA

Electrical connection: plug M 12x1

Meas. range overflow: I<sub>out</sub> approx. 20.5 mA  
from 103 % of full scale

#### DUK-...L443 (usage with AUF-3000)

Output: 4 - 20 mA, 3-wire

Load: max. 500 Ω

Power supply: 24 V<sub>DC</sub> ± 20 %

Power consumption: max. 45 mA

Electrical connection: plug DIN 43650

Meas. range overflow: I<sub>out</sub> approx. 20.5 mA  
from 103 % of full scale

#### DUK-...F300, DUK-...F390

Impulse output: PNP, open collector,  
max. 200 mA

Frequency at F.S.: 500 Hz (...F300)  
50...1000 Hz (...F390)  
proportional to flow rate

Power supply: 24 V<sub>DC</sub> ± 20 %

Power consumption: 25 mA

Electrical connection: plug M 12, 4-pin

Meas. range overflow: F<sub>out</sub> approx. 2 kHz  
from 105 % of full scale

#### DUK-...C3T0 (U-PACE electronics)

Supply voltage: 19 - 30 V<sub>DC</sub>, internal power  
consumption max. 200 mA

Display: TFT display, 128x128 pixels,  
1.4" display orientation in 90°  
steps adjustable

Display repetition rate: 0.5... 10 s, adjustable

Pulse output: Push-Pull, freely scalable,  
configurable for partial and  
accumulated totaliser

Frequency output: Push-Pull, freely scalable,  
2 kHz @ overflow  
f<sub>min</sub> @ FS = 50 Hz  
f<sub>max</sub> @ FS = 1000 Hz

#### DUK-...L303; DUK-...L343

Output: 0(4)-20 mA, 3-wire

Load: max. 500 Ω

Power supply: 24 V<sub>DC</sub> ± 20 %



#### Electrical Details (continued)

|                         |                                                                                                                                                            |
|-------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Alarm output:           | NPN, PNP, Push-Pull,<br>configurable max. 30 V <sub>DC</sub> , max.<br>200 mA short-circuit proof                                                          |
| Analogue output:        | active, 3 wire, 0(4)-20 mA,<br>max. load 500 Ω or 0(2)-10 V <sub>DC</sub> ,<br>(R <sub>i</sub> = 500 Ω)<br>(factory calibrated with R <sub>L</sub> = 1 MΩ) |
| Control input:          | active signal U <sub>high</sub> max. 30 V <sub>DC</sub><br>0 < Low < 10 V <sub>DC</sub><br>15 V <sub>DC</sub> < High < V <sub>s</sub>                      |
| Dosing function:        | Dosing output OUT2:<br>Push-Pull, High active<br>Control input OUT1:<br>START/STOP 0.5 s < t <sub>high</sub> < 4 s<br>RESET t <sub>high</sub> > 5 s        |
| Electrical connection:  | plug M12x1, 4-pin                                                                                                                                          |
| Shock resistance        |                                                                                                                                                            |
| DIN EN 60068-2-27:2010: | 20 g (11 ms)                                                                                                                                               |
| Vibration resistance    |                                                                                                                                                            |
| DIN EN 60068-2-6:2008:  | 5 g (10 ... 2000 Hz)                                                                                                                                       |
| Environmental testing   |                                                                                                                                                            |
| DIN EN 60068-2-30:2006: | severity level b                                                                                                                                           |

When operated under the CSA Label, the equipments shall be supplied with an external power supply which fulfils the requirements of Cl. 6.3.1, 6.3.2, 9.4 of IEC/CSA/UL 61010-1 and fulfils the requirements of the national authorities.

For example, by the use of a Class 2 Limited Power Source (LPS)

#### Configuration of outputs


| Output 1 (OUT1, PIN 4)        | Output 2 (OUT2, PIN 2)      |
|-------------------------------|-----------------------------|
| Analogue output 4-20 mA       | Analogue output 4-20 mA     |
| Analogue output 0-20 mA       | Analogue output 0-20 mA     |
| Analogue output 2-10 V        | Analogue output 2-10 V      |
| Analogue output 0-10 V        | Analogue output 0-10 V      |
| Switching output NPN/PNP/PP   | Switching output NPN/PNP/PP |
| Pulse output PP               | Pulse output PP             |
| Frequency output PP           | Frequency output PP         |
| Communication mode KofCom     |                             |
| Communication mode IO-Link    |                             |
| Control input                 |                             |
| Control input dosing function | Dosing output               |

#### IO-Link specification


|                         |                                     |
|-------------------------|-------------------------------------|
| Manufacturer ID:        | 1105 (decimal), 0 x 0451 (hex)      |
| Manufacturer name:      | Kobold Messring GmbH                |
| IO-Link specification:  | V1.1                                |
| Bitrate:                | COM3                                |
| Minimal cycle time:     | 1,1 ms                              |
| SIO-Mode:               | yes (OUT1 in configuration IO-Link) |
| Block parameterisation: | yes                                 |
| Operational readiness:  | 10 s                                |
| Max. cable length:      | 20 m                                |

## Electrical Connection


### DUK-...S300




### DUK-...S30D




### DUK-...F3x0, DUK-...L3x3



### DUK-...L443



### DUK-...C3T0

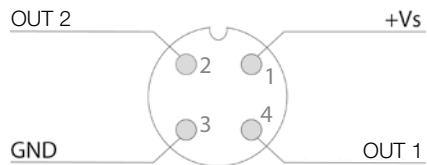

## Order Details (Example: DUK-11 G4H S300 L)

| Housing material/<br>Sealing                                                                                              | Connection/Measuring range                                                                                                                                                                                                                                                                                                                                                                                                                 | Electronic                                                                                                                                                                                                                                                                                                                                            | Flow direction                                                                                                                            | Options                                                                                                                                      |
|---------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|
| <b>DUK-11<sup>4)</sup></b> =<br>brass/<br>NBR<br><br><b>DUK-32<sup>5)</sup></b> =<br>stainless<br>steel<br>1.4408/<br>FKM | <b>G3H</b> = G ½ female<br>(meas. range 0.01 - 15 l/min)<br><b>G4H</b> = G ½ female<br>(meas. range 0.08 - 20 l/min)<br><b>G5H</b> = G ¾ female<br>(meas. range 0.16 - 40 l/min)<br><b>G6H</b> = G 1 female<br>(meas. range 0.25 - 63 l/min)<br><b>G8H</b> = G 1½ female<br>(meas. range 0.6 - 150 l/min)<br><b>G9H</b> = G 2 female<br>(meas. range 1 - 250 l/min)<br><b>GBH</b> = G 3 female<br>(meas. range 2.5 - 630 l/min)            | <b>Switching output</b><br><b>S300</b> = relay, M12-plug<br><b>S30D</b> = aktiv 24 V <sub>DC</sub> , M12-plug<br><b>Frequency output</b><br><b>F300</b> = M12-plug, 500 Hz<br><b>F390</b> = M12-plug, 50...1000 Hz<br><b>Analogue output</b><br><b>L303</b> = M12-plug, 0-20 mA<br><b>L343</b> = M12-plug, 4-20 mA<br><b>L443</b> = DIN-plug, 4-20 mA | <b>L</b> = from left<br>to right<br><b>R</b> = from right to left<br><b>T</b> = from top to<br>bottom<br><b>B</b> = from bottom<br>to top | without = without<br><b>Y</b> = special<br>option<br>(specify in<br>clear text)                                                              |
|                                                                                                                           | <b>N3G</b> = ½" NPT female<br>(meas. range 0.16 - 240 GPH)<br><b>N4G</b> = ½" NPT female<br>(meas. range 0.02 - 5 GPM)<br><b>N5G</b> = ¾" NPT female<br>(meas. range 0.04 - 10 GPM)<br><b>N6G</b> = 1" NPT female<br>(meas. range 0.06 - 16 GPM)<br><b>N8G</b> = 1½" NPT female<br>(meas. range 0.16 - 40 GPM)<br><b>N9G</b> = 2" NPT female<br>(meas. range 0.25 - 65 GPM)<br><b>NBG</b> = 3" NPT female<br>(meas. range +-0.6 - 160 GPM) | <b>U-PACE electronics</b><br><b>C3T0<sup>7)</sup></b> = compact, TFT display,<br>2 outputs (current/voltage/pulse/<br>frequency/alarm output/IO link configurable),<br>M12x1 plug, with cCSAus and IECCE<br>CB Scheme Approval                                                                                                                        |                                                                                                                                           | <b>0</b> = without<br><b>A<sup>3)</sup></b> = incl.<br>medium<br>configuration<br><b>K<sup>6)</sup></b> = including<br>calibration<br>report |

<sup>2)</sup> While ordering please specify cable length in metres

<sup>3)</sup> Medium configuration based on Media Data Base (see following page). **Ordering code ABG-DUK.**

NOTE: The standard factory configuration for DUK is always with "water".

<sup>4)</sup> For FKM sealing, use model code **DUK-31**. For EPDM sealing, use model code **DUK-51**. Brass housing not available with connection code "3"

<sup>5)</sup> For NBR-sealing, use model code **DUK-12**. For EPDM sealing, use model code **DUK-52**.

<sup>6)</sup> Number of measuring points (standard): 5

<sup>7)</sup> l/min-package (nameplate (l/min, °C, bar)), calibrated range and temperature °C

GPM-package (nameplate (GPM or GPH, °F, PSI)), calibrated range and temperature °F

## Order Details for C3T0 Electronic Accessories

| Model                         | Description                                                                                                                                                                                                                                                 | Image                                                                                 |
|-------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| <b>KOFICOM-IFMU</b>           | PC-Interface Set (necessary for the use of „Software Mediator Tools“) comprising:<br>• KofiCom Interface<br>• USB cable (length: 1 m) for connection PC <-> KofiCom Interface<br>• M12 cable with plug + socket (length: 1 m each) for connecting of device |  |
| <b>Software MEDIATOR Tool</b> | Windows software for exchanging of media tables when using viscous media<br>except water<br>(free download under <a href="https://www.kobold.com/qr/DUK">https://www.kobold.com/qr/DUK</a> )                                                                | -                                                                                     |



### DUK Media Tables Overview <sup>1) 2) 3)</sup>

(excerpt only. Detailed media table is available in "MEDIATOR Tool" at <https://www.kobold.com/qr/DUK>)

| Nr.   | Filename             | Infotext Display | Description                                                                                                 |
|-------|----------------------|------------------|-------------------------------------------------------------------------------------------------------------|
| 001   | DUK_Water            | 001 DUK WATER    | Water 100%                                                                                                  |
| 002   | DUK_Water Glycol 20  | 002 DUK H2OGLY20 | Water Glycol Mixture 20%                                                                                    |
| 003   | DUK_Water Glycol 34  | 003 DUK H2OGLY34 | Water Glycol Mixture 34%                                                                                    |
| 004   | DUK_Water Glycol 39  | 004 DUK H2OGLY39 | Water Glycol Mixture 39%                                                                                    |
| 005   | DUK_Water Glycol 52  | 005 DUK H2OGLY52 | Water Glycol Mixture 52%                                                                                    |
| 006   | DUK_Alkan Solvent    | 006 DUK ALKAN    | Solvent/Alkan comparable to Exxsol D120, 4mm <sup>2</sup> /s@25°C                                           |
| 007   | DUK_Oil ISO VG 10 4  | 007 DUK OIL VG10 | Mineral transmission Oil Shell ISO VG 10, 10mm <sup>2</sup> /s@40°C, for DUK Size "4" only                  |
| 008   | DUK_Oil ISO VG 10 5+ | 008 DUK OILVG10+ | Mineral transmission Oil Shell ISO VG 10, 10mm <sup>2</sup> /s@40°C, for DUK Size "3"; "5" and greater only |
| 009   | DUK_Oil ISO VG 22 4  | 009 DUK OIL VG22 | Mineral machine Oil Shell ISO VG 22, 22mm <sup>2</sup> /s@40°C, for DUK Size "4" only                       |
| 010   | DUK_Oil ISO VG 22 5+ | 010 DUK OILVG22+ | Mineral machine Oil Shell ISO VG 22, 22mm <sup>2</sup> /s@40°C, for DUK Size "3"; "5" and greater only      |
| 011   | DUK_Oil ISO VG 32 4  | 011 DUK OIL VG32 | Mineral machine Oil Shell ISO VG 32, 32mm <sup>2</sup> /s@40°C, for DUK Size "4" only                       |
| 012   | DUK_Oil ISO VG 32 5+ | 012 DUK OILVG32+ | Mineral machine Oil Shell ISO VG 32, 32mm <sup>2</sup> /s@40°C, for DUK Size "3"; "5" and greater only      |
| 013   | DUK_Oil ISO VG 46 4  | 013 DUK OIL VG46 | Mineral machine Oil Shell ISO VG 46, 46mm <sup>2</sup> /s@40°C, for DUK Size "4" only                       |
| 014   | DUK_Oil ISO VG 46 5+ | 014 DUK OILVG46+ | Mineral machine Oil Shell ISO VG 46, 46mm <sup>2</sup> /s@40°C, for DUK Size "3"; "5" and greater only      |
| 015   | DUK_Oil ISO VG 68 4  | 015 DUK OIL VG68 | Mineral machine Oil Shell ISO VG 68, 68mm <sup>2</sup> /s@40°C, for DUK Size "4" only                       |
| 016   | DUK_Oil ISO VG 68 5+ | 016 DUK OILVG68+ | Mineral machine Oil Shell ISO VG 68, 68mm <sup>2</sup> /s@40°C, for DUK Size "3"; "5" and greater only      |
| 017/1 | DUK_Ethanol 4        | 017 DUK Ethanol  | Ethanol, for DUK Size "4" only                                                                              |
| 017/2 | DUK_Ethanol 5+       | 017 DUK Ethanol+ | Ethanol, for DUK Size "3"; "5" and greater only                                                             |
| 018   | DUK_Fuel 100LL       | 018 DUK FUEL100L | Fuel (Airplanes) 100LL                                                                                      |
| 019   | DUK_Chloroform       | 019 DUK CHLOFORM | Chloroform                                                                                                  |
| 020   | DUK_Aceton           | 020 DUK ACETON   | Aceton                                                                                                      |
| 021   | DUK_Anilin           | 021 DUK ANILIN   | Anilin                                                                                                      |
| 022   | not available        |                  |                                                                                                             |
| 023   | DUK_Cyclohexane      | 023 DUK CYCLOHEX | Cyclohexane                                                                                                 |
| 024   | DUK_Diesel EN590     | 024 DUK DIESEL   | Diesel EN590                                                                                                |
| 025   | DUK_Acetic Acid 5%   | 025 DUK ACACID 5 | Acetic Acid 5%                                                                                              |
| 026   | DUK_Acetic Acid 10%  | 026 DUK ACACID10 | Acetic Acid 10%                                                                                             |
| 027   | DUK_Acetic Acid 20%  | 027 DUK ACACID20 | Acetic Acid 20%                                                                                             |
| 028   | DUK_Ethylene Glycol  | 028 DUK ETHGLYC  | Ethylene Glycol 100%                                                                                        |
| 029   | DUK_Glyzerine 4      | 029 DUK GLYCERIN | Glycerine, for DUK Size "4" only                                                                            |
| 030   | DUK_Glyzerine 5+     | 030 DUK GLYCERIN | Glycerine, for DUK Size "3"; "5" and greater only                                                           |
| 031   | DUK_Methylacetate    | 031 DUK METHACET | Methylacetate                                                                                               |
| 032   | DUK_Hexane           | 032 DUK HEXANE   | Hexane                                                                                                      |
| 033   | DUK_n-Pentane        | 033 DUK PENTANE  | n-Pentane                                                                                                   |
| 034   | DUK_n-Octane         | 034 DUK OCTANE   | n-Octane                                                                                                    |
| 035   | DUK_Xylene           | 035 DUK XYLENE   | O-Xylene; O-Xylol; 1,2 Dimethylbenzol                                                                       |
| 036   | DUK_Petroleum        | 036 DUK PETROLEU | Petroleum                                                                                                   |

(continued on next page)



**DUK Media Tables Overview<sup>1)2)3)</sup>** (continued)

(excerpt only. Detailed media table is available in "MEDIATOR Tool" at <https://www.kobold.com/qr/DUK>)

| Nr. | Filename                     | Infotext Display | Description                                                   |
|-----|------------------------------|------------------|---------------------------------------------------------------|
| 037 | DUK_Seawater                 | 037 DUK SEAWAT   | Seawater                                                      |
| 038 | DUK_Triglycerid              | 038 DUK TRIGLYC  | Triglycerid                                                   |
| 039 | DUK_Corn Oil 4               | 039 DUK CORNOIL  | Cornoil, for DUK Size "4" only                                |
| 040 | DUK_Corn Oil 5+              | 040 DUK CORNOIL  | Cornoil, for DUK Size "3"; "5" and greater only               |
| 041 | DUK_Palm Oil 4               | 041 DUK PALMOIL  | Palmoil, for DUK Size "4" only                                |
| 042 | DUK_Palm Oil 5+              | 042 DUK PALMOIL  | Palmoil, for DUK Size "3"; "5" and greater only               |
| 043 | DUK_Rapeseed Oil             | 043 DUK RAPEOIL  | Rapeseedoil                                                   |
| 044 | DUK_Olive Oil 4              | 044 DUK OLIVEOIL | Oliveoil, for DUK Size "4" only                               |
| 045 | DUK_Olive Oil 5+             | 045 DUK OLIVEOIL | Oliveoil, for DUK Size "3"; "5" and greater only              |
| 046 | DUK_Carbontetrachloride      | 046 DUK CARCHL   | Carbonetetrachloride                                          |
| 047 | DUK_Benzene                  | 047 DUK BENZENE  | Benzene                                                       |
| 048 | DUK_Gasoline ROZ 95          | 048 DUK GAS 95   | Gasoline ROZ 95                                               |
| 049 | DUK_Gasoline ROZ 98          | 049 DUK GAS 98   | Gasoline ROZ 98                                               |
| 050 | DUK_Biodiesel EN14214        | 050 DUK BIODIE   | Biodiesel SN EN 14214                                         |
| 051 | DUK_Fuel Oil EL              | 051 DUK FUELOIL  | Fuel Oil ExtraLight                                           |
| 052 | DUK_Fuel Oil L               | 052 DUK FUELOIL  | Fuel Oil Light                                                |
| 053 | DUK_Methanol                 | 053 DUK METHANOL | Methanol                                                      |
| 054 | DUK_Oil BOT291S 4            | 054 DUK BOT291S  | Castrol BOT 291 S, for DUK Size "4" only                      |
| 055 | DUK_Oil BOT291S 5+           | 055 DUK BOT291S  | Castrol BOT 291 S, for DUK Size "3"; "5" and greater only     |
| 056 | DUK_Silicon Oil              | 056 DUK SilOil 1 | Silicon Oil M80.055.03 range -20°C up to 50°C                 |
| 057 | DUK_Ethylen Glykol Kryo 30   | 057 DUK Kryo 30  | Ethylene Glycol 75% Lauda Kryo 30                             |
| 058 | DUK_BOT2350                  | 058 DUK BOT2350  | Castrol BOT 2350                                              |
| 059 | DUK_Afton ETF-000973-B-02 4  | 059 DUK ETF973B2 | Afton ETF-000973-B-02, for DUK Size "4" only                  |
| 060 | DUK_Afton ETF-000973-B-02 5+ | 060 DUK ETF973B2 | Afton ETF-000973-B-02, for DUK Size "3"; "5" and greater only |
| 061 | 061 DUK_Shell GRP III 4      | 061 DUK GRP III  | Shell GRP III, for DUK Size "4" only                          |
| 062 | 062 DUK_Shell GRP III 5+     | 062 DUK GRP III  | Shell GRP III, for DUK Size "3"; "5" and greater only         |
| ... | ...                          | ...              | ... more media in "MEDIATOR Tool"                             |

<sup>1)</sup> Operate the device with newtonian media below the boiling point only


<sup>2)</sup> Device has no ATEX approval

<sup>3)</sup> Material resistance has to be checked by customer

## Dimensions


DUK-...S30x, DUK-...F3x0, DUK-...L3x3

| Model    | G/<br>NPT | SW<br>[mm] | H<br>[mm] | H2  | L<br>[mm] | B<br>[mm] |
|----------|-----------|------------|-----------|-----|-----------|-----------|
| DUK-xxx3 | ½"        | 30         | 63        | 101 | 130       | 100       |
| DUK-xxx4 | ½"        | 30         | 63        | 75  | 114       | 85        |
| DUK-xxx5 | ¾"        | 36         | 65        | 77  | 126,5     | 89        |
| DUK-xxx6 | 1"        | 46         | 69        | 81  | 146       | 93        |
| DUK-xxx8 | 1½"       | 60         | 75        | 87  | 190       | 103       |
| DUK-xxx9 | 2"        | 76         | 80        | 92  | 238       | 114       |
| DUK-xxxB | 3"        | 105        | 90        | 102 | 306       | 135       |

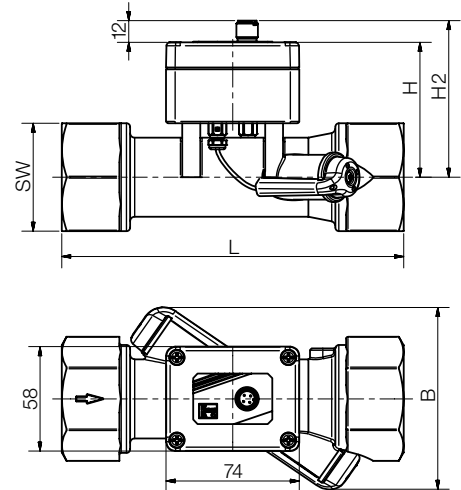

DUK-...L443

| Model    | G/<br>NPT | SW<br>[mm] | H<br>[mm] | H2  | L<br>[mm] | B<br>[mm] |
|----------|-----------|------------|-----------|-----|-----------|-----------|
| DUK-xxx3 | ½"        | 30         | 63        | 101 | 130       | 100       |
| DUK-xxx4 | ½"        | 30         | 63        | 101 | 114       | 85        |
| DUK-xxx5 | ¾"        | 36         | 65        | 103 | 126.5     | 89        |
| DUK-xxx6 | 1"        | 46         | 69        | 107 | 146       | 93        |
| DUK-xxx8 | 1½"       | 60         | 75        | 113 | 190       | 103       |
| DUK-xxx9 | 2"        | 76         | 80        | 118 | 238       | 114       |
| DUK-xxxB | 3"        | 105        | 90        | 128 | 306       | 135       |

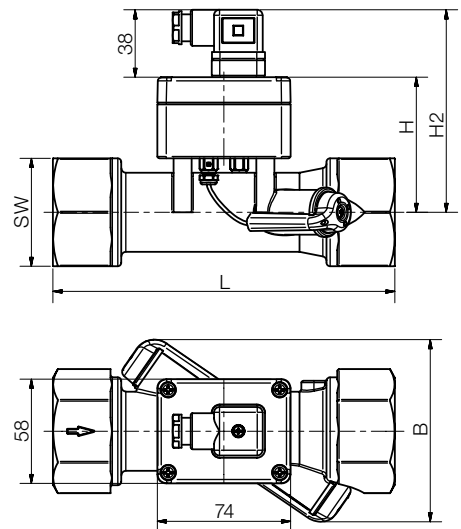



**Dimensions** (continued)

**DUK-...C3T0**

| Model    | G/NPT | SW<br>[mm] | H<br>[mm] | L<br>[mm] | B<br>[mm] |
|----------|-------|------------|-----------|-----------|-----------|
| DUK-xxx3 | ½"    | 30         | 85        | 130       | 100       |
| DUK-xxx4 | ½"    | 30         | 85        | 114       | 85        |
| DUK-xxx5 | ¾"    | 36         | 87        | 126.5     | 89        |
| DUK-xxx6 | 1"    | 46         | 91        | 146       | 93        |
| DUK-xxx8 | 1½"   | 60         | 97        | 190       | 103       |
| DUK-xxx9 | 2"    | 76         | 102       | 238       | 114       |
| DUK-xxxB | 3"    | 105        | 112       | 306       | 135       |

