



PRODUCT DATA SHEET

MX25F-1SH - 1" DIGITAL FLOW METER WITH ERB DISPLAY

The MX Series 1" DIGITAL FLOW METER are suitable for flows between 6 – 120 L/min (1.59 - 31.70 GPM), providing highly accurate flow measurement performance. The MX Series offers $\pm 0.5\%$ accuracy of true reading in a compact footprint, requiring no flow conditioning and with high pressure and temperature capabilities.

Key features include:

- Aluminium (6061) construction
- FKM (Viton) seals
- Maximum flow rate 120 L/min / 31.70 GPM
- Accuracy of $\pm 0.5\%$ of reading
- Exceptional repeatability of $\pm 0.03\%$
- Temperature up to 80 °C / 176 °F
- 1 point factory calibration as standard, with additional points upon request



P: 03 5956 8685 M: 0488 029 256

Email: sales@besflowmeters.com.au

SPECIFICATIONS



MX25F-1SH

ERB Digital Register

		MX25F-1SH		
Material of construction				
Meter Body		Aluminium (6061)		
Rotor		PPS		
Seals		FKM (Viton)		
Design Specifications				
Process Connections		1" G Thread		
Technical Specifications		min	max	
Flow rate		10	100	L/min
< 5cPr		2.64	26.42	GPM
> 5cP		6	120	L/min
		1.59	31.70	GPM
Non lubricating fluids		-	120	L/min
		-	31.70	GPM
Operating Temperature Range**		-40	80	°C
		-40	176	°F
Accuracy ($\pm\%$)		$\pm 0.5\%$		
Repeatability ($\pm\%$)		$\pm 0.03\%$		
Nominal K-Factor		36 Pulses/Litre		
		136.31 Pulses/Gallon		

OUTPUT TYPE




ERB DISPLAY

		ERB [LCD 17mm display]
Construction		Aluminium
IP Rating		IP67
Temp		Min: -40 Max: 80 °C Min: -40 Max: 176 °F
EX Approvals		- Please refer to instruction manual and certification documentation for product appropriate certification information
Display		17mm/8mm
Digit size (upper/lower)		✓
Accumulated total		✓
Resettable total		✓
Preset total		✓
Flow rate		✓
Outputs		
4-20 mA (passive)		✗
Pulse/Transistor Output		✗
Flow Alarm		✗
Batch Control output		✓



PRODUCT DATA SHEET

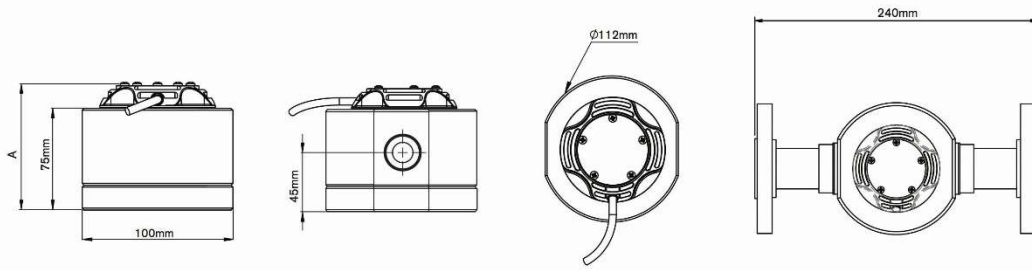

PULSER AND DISPLAY HEIGHT - A

OUTPUT A,I,J,K
PULSER - Standard

OUTPUT B
PULSER - Exia

OUTPUT C
PULSER - EXd

OUTPUT N
PULSER - Exia

OUTPUT T
PULSER - High Temp.

OUTPUT D,E
DISPLAY - LCD 12mm

OUTPUT F,G,H DISPLAY
- LCD 17mm

